
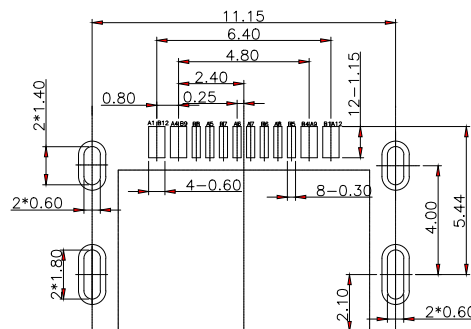

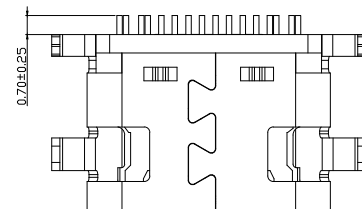
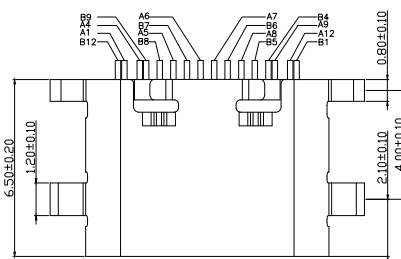
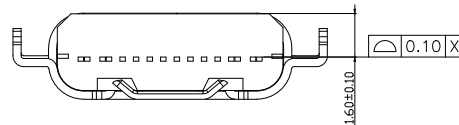


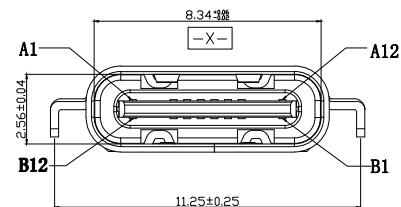

RECOMMENDED P.C.B. LAYOUT  
TOLERANCE UNSPECIFIED  $\pm 0.05\text{mm}$

## 备注:

## 1. 材质:

1.1 胶芯: LCP UL94V-0

1.2 端子: 高导电C7025/C2680; 镍底30U" MIN,  
接触区域镀金 (AU 1u") 焊接区镀金G/F

1.3 外壳: SUS201/SUS304, T=0.30mm; 表面镀镍50U" MIN

1.4 中夹片: SUS301/SUS201;

## 2. 主要特性:

2.1 额定电流: 3A/5A

2.2 接触阻抗: 40mΩ MAX (初始值)  
50mΩ MAX (测试后)

2.3 绝缘阻抗: 100MΩ MIN

2.4 耐压测试: 100V AC R. M. S.

2.6 整体插入力: 5-20N 整体插入力: 5-20N (耐久后)  
整体拔出: 8-20N 整体拔出: 6-20N (耐久后)


2.7 耐久: 10000次

2.8 耐高温: SMT回流焊 (峰值260°  $\pm 5^\circ$ ), 塑胶不能有起泡,  
融胶等不良, 变色, 翘曲变形在公差范围以内;


2.9 产品须做焊锡测试, 粘锡面积达到95%以上;

3.0 盐雾测试: 24H MIN

3.1 工作温度: -30℃ ~ +85℃



## 料号编码:

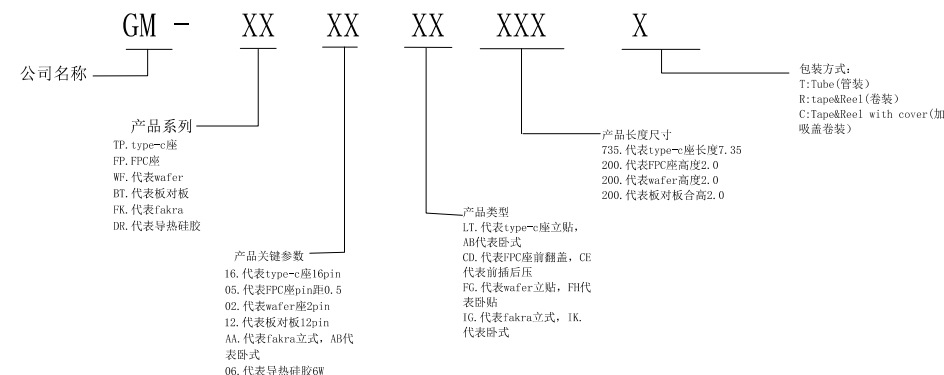

|     |             |     |             |
|-----|-------------|-----|-------------|
| A1  | GND         | B12 | GND         |
| A4  | VBUS        | B9  | VBUS        |
| A5  | CC1         | B8  | SBU2        |
| A6  | DP1         | B7  | DN2         |
| A7  | DN1         | B6  | DP2         |
| A8  | SBU1        | B5  | CC2         |
| A9  | VBUS        | B4  | VBUS        |
| A12 | GND         | B1  | GND         |
| PIN | SIGNAL NAME | PIN | SIGNAL NAME |

MEASURE POINT:  
QUADRANT POINT ☐ QP  
TANGENCY POINT ☐ TP  
INTERSECTION POINT ☐ IP

UNLESS OTHERWISE  
SPECIFIED, TOLERANCE:  
X.  $\pm 0.25$   
X. x  $\pm 0.20$   
X. xx  $\pm 0.15$   
X. xxx  $\pm 0.10$   
ANGLES  $\pm 2^\circ$




深圳金盟实业有限公司  
ShenzhenJinmengIndustrialCo., Ltd

TITLE: USB 连接器 TYPE C  
16PIN 母座 L=6.5mm 卧式四脚  
沉板1.6mm

DRAW NO: GM-TP 16 AB 650 R  
TEL: 0755-89973631

THIRD ANGLE PROJECTION



UNIT:

mm

SCALE:


1:1

SIZE:


A4

SHEET:

1/2

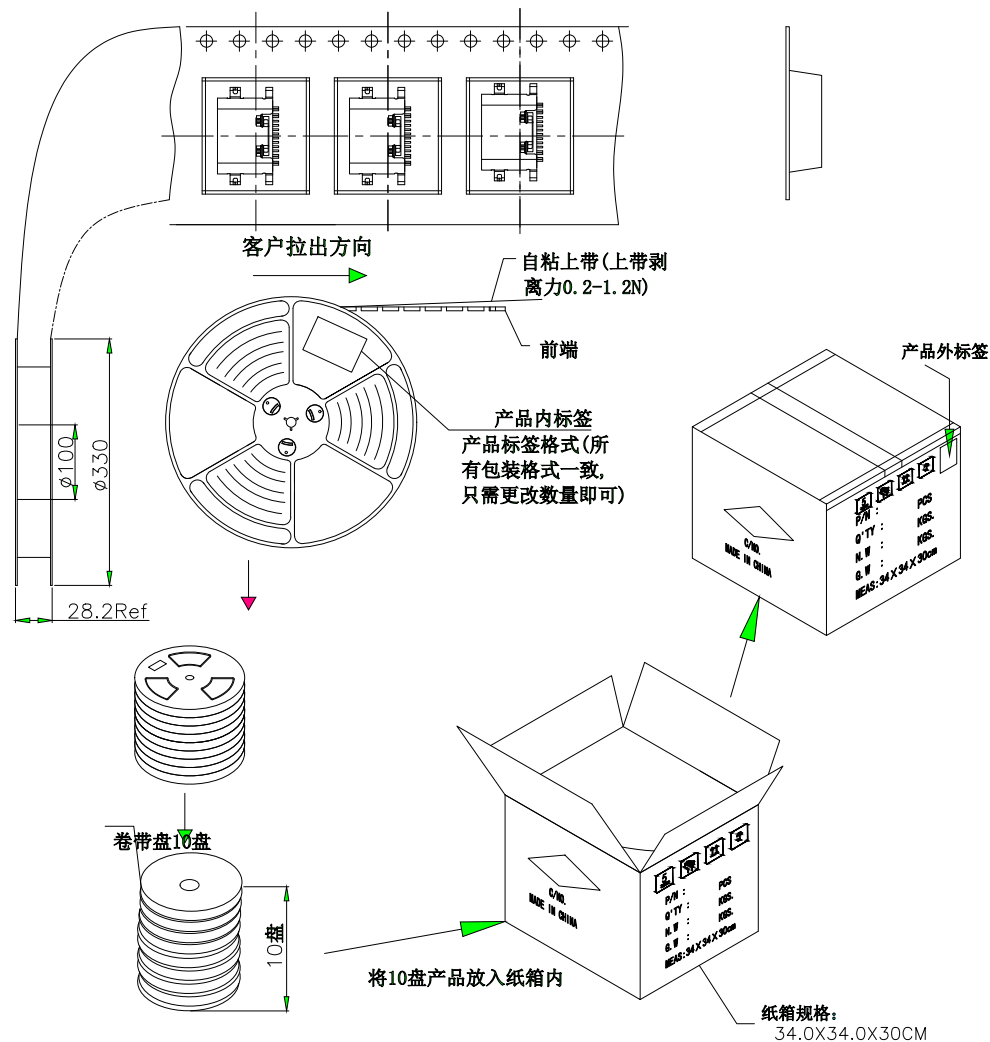

包装示意图:

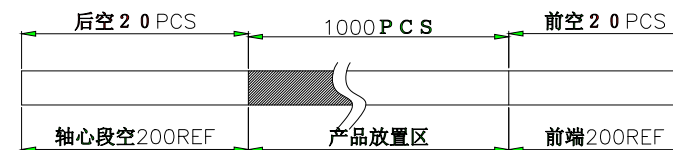

## 备注

- 1.把上下载带送入载带机进行调整,然后将产品按照指定的方式摆入下载带中,开动卷带机进行卷装(每卷包1000PCS),卷装完成后需用上带缠绕最少20CM;
- 2.在卷装K的每卷盘面的指定位置上贴上物料和RoHS标签装入纸箱内;每箱装10盘
- 3.纸箱用封箱带将其封好,胶带要求工字型,不可遮住标签;
- 4.如果客户对包装标签另有要求,请按客户要求作业;有未满足之零数箱需用缓冲材料填充;
- 5.上载带剥离力0.2-1.2N.;

MEASURE POINT:  
QUADRANT POINT QP  
TANGENCY POINT TP  
INTERSECTION POINT IP

UNLESS OTHERWISE  
SPECIFIED, TOLERANCE:

X.  $\pm 0.25$   
X.x  $\pm 0.20$   
X.xx  $\pm 0.15$   
X.xxx  $\pm 0.10$   
ANGLES  $\pm 2^\circ$




深圳金盟实业有限公司  
ShenzhenJinmeng Industrial Co., Ltd

TITLE:USB 连接器 TYPE C  
16PIN 母座 L=6.5mm 卧式四脚  
沉板1.6mm

DRAW NO:GM-TP 16 AB 650 R

TEL:0755-89973631

THIRD ANGLE PROJECTION



UNIT:

mm

SCALE:

1:1

SIZE:

A4

SHEET:

1/2