
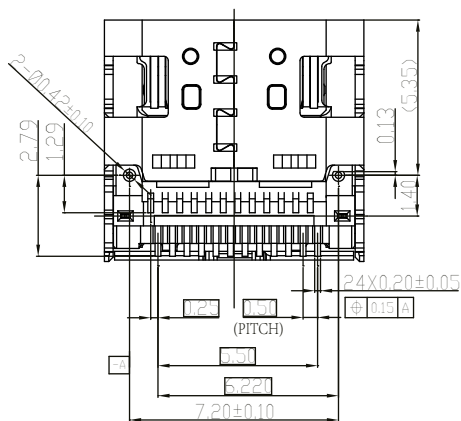
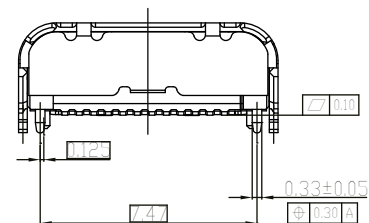
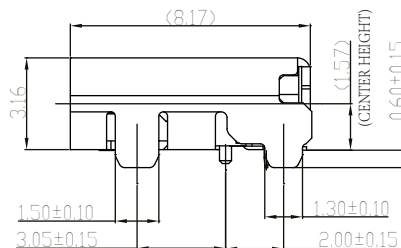
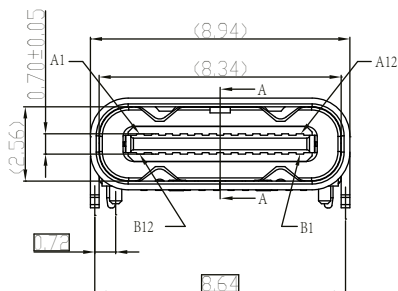
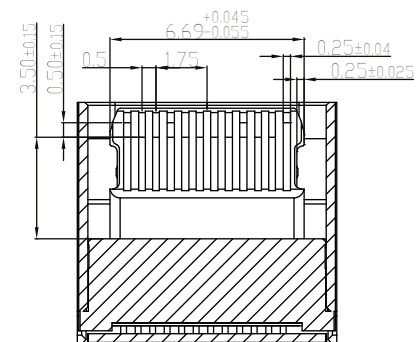
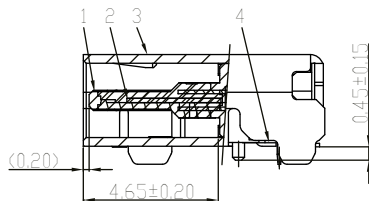


ROHS
Compatible



NOTE/注释:

1. SPECIFICATION/规格:

- 1.1 Rated current (额定电流): 1.5A/Pin MAX (A4, A9, BB4, B9)
1.25A/Pin MAX (A1, A12, B1, B12), 0.25A (OTHER PIN)
- 1.2 Voltage rating (额定电压): 5V AC
- 1.3 Contact Resistance (接触阻抗): 40 m Ω Max.
- 1.4 Insulation Resistance (绝缘阻抗): 100M Ω Min.
- 1.5 Withstanding voltage (耐电压): 100 VAC/minute
- 1.6 Mating force (插入力): 5~20N.
- 1.7 Unmating force (拔出力): 8~20N.
- 1.8 Durability Cycle (寿命循环): 10,000 cycle
- 1.9 Operating temperature (工作温度): -40° ~ +85°

H=镀金1u"
J=镀金3u"
K=镀金5u"
M=镀金15u"
N=镀金30u"

PIN ASSIGNMENT:

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1-	Vbus	CC1	D+	D-	SBU1	Vbus	RX2-	RX2+	GND
GND	RX1+	RX1-	Vbus	SBU2	D-	D+	CC2	Vbus	TX2-	TX2+	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

DESIGN	LI Jinwei	SC ALL			DRAWG NO. 01.01.00002
DRAWING	Wu Qifa	UNIT	mm		
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		
APPROVAL	Liu Xiaohong	DATE	2020-06-10		
				TOLERANCE	
				X.X ±0.30	X.°±2°
				.XX ±0.20	.X°±1°
				.XXX ±0.10	.XX°±0.5°




深圳金盟实业有限公司

shenzhenjinmengindustrialco.,ltd

24P 板上型四脚插板SMT有柱带弹 8.17L

ROHS

Compatible

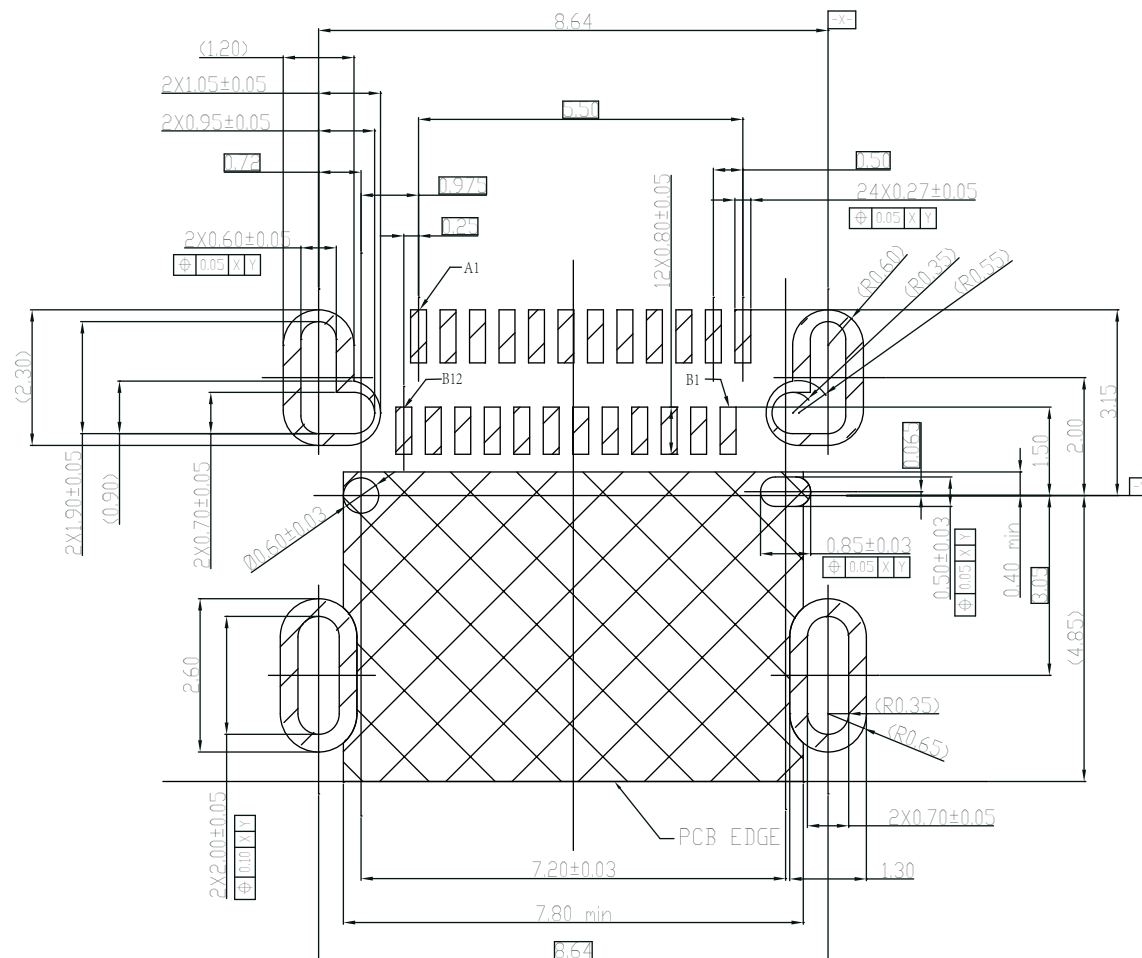



4	TERMINAL	24	C18140	MATING SIDE/SEE PART NO; SOLDER TAIL/Gold FLASH, 50u" NICKEL OVERALL.	T=0.12
3	SHELL	1	SUS304	NICKEL PLATING	T=0.30
2	MID PLATE	1	SUS301	NICKEL PLATING	T=0.15
1	MAIN HOUSING	1	PA9T HF 30%玻纤, UL94 V-0, 黑色		BLACK UL94V-0
ITEM	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARK
BILL OF MATERIAL					

DESIGN	Li Jinwei	SC ALL		 TOLERANCE X.X ±0.30 X.°±2° .XX ±0.20 X.°±1° .XXX ±0.10 .XX°±0.5°	DRAWG NO. 01.01.00002
DRAWING	Wu Qifai	UNIT	mm		
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		TITLE: 24P 板上型四脚插板SMT有柱带弹 8.17L
APPROVAL	Liu Xiaohong	DATE	2020-06-10		



深圳金盟实业有限公司
shenzhenjinhengindustrialco.,ltd

ROHS
Compatible

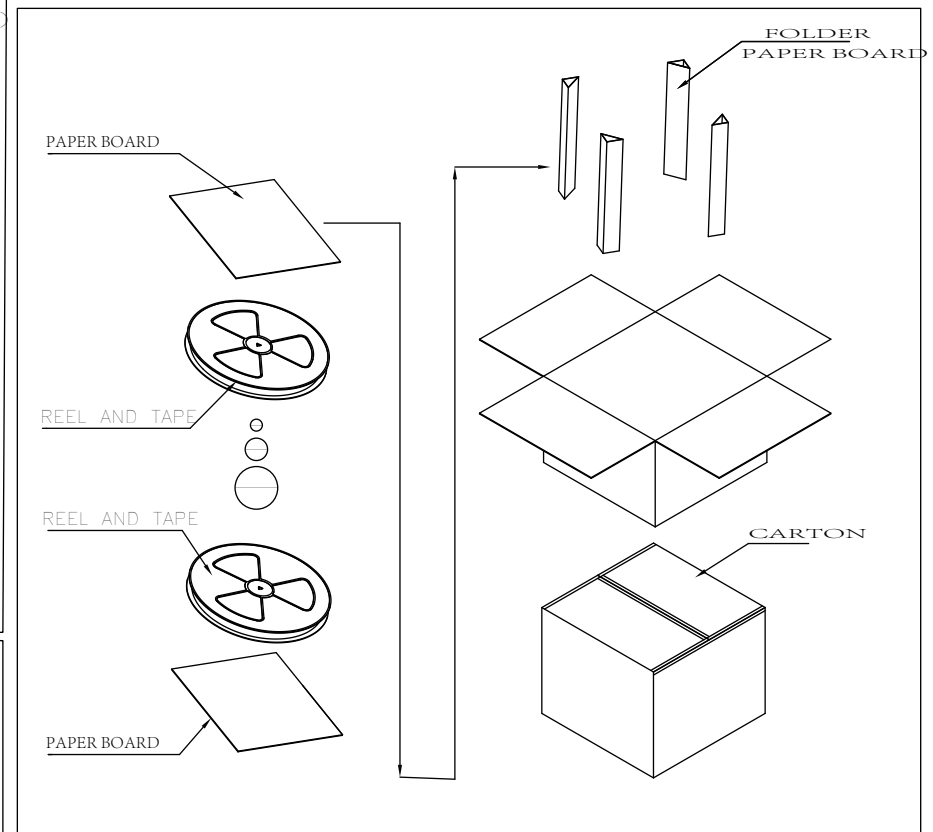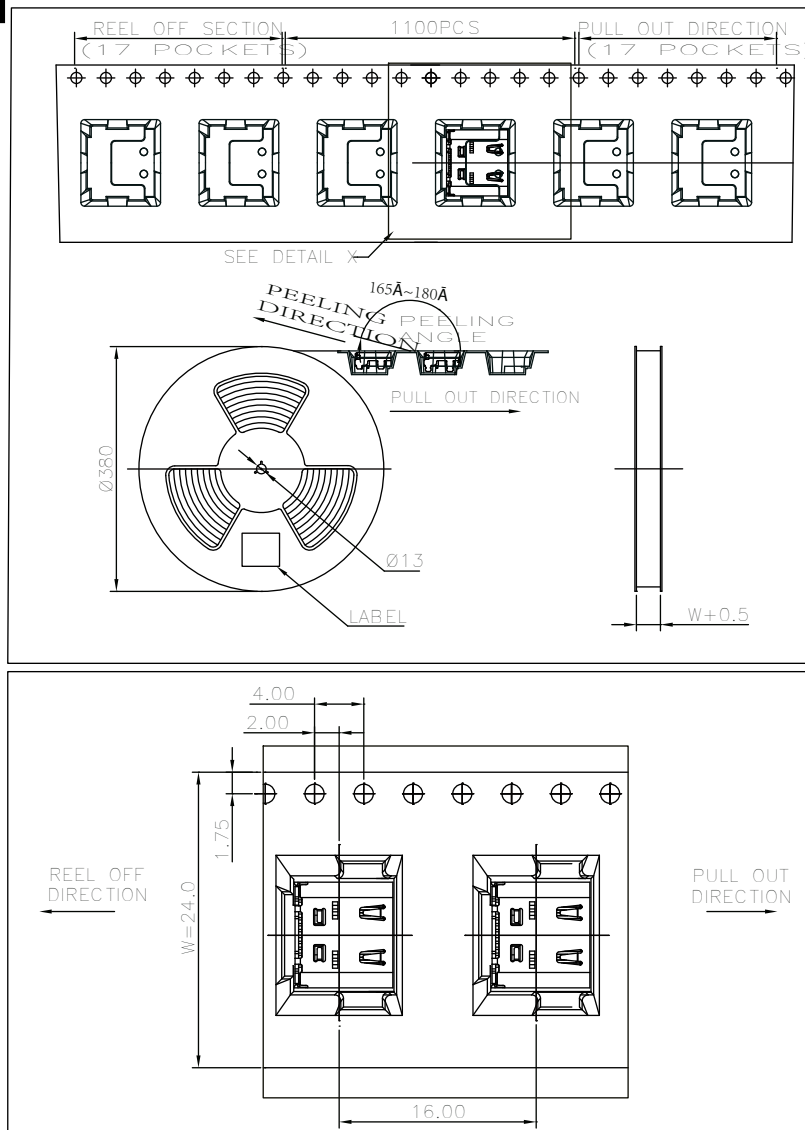

	REEL	CARTON
CONNECTOR (PCS)	1100	11000

DESIGN	Li Jinwei	SC ALL			DRAWG NO.
DRAWING	Wu Qifa	UNIT	mm	TOLERANCE	01.01.00002
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297	X.X ±0.30 X.°±2°	TITLE:
APPROVAL	Liu Xiaohong	DATE	2020-06-10	.XX ±0.20 .X°±1°	24P 板上型四脚插板SMT有柱带弹 8.17L
				.XXX ±0.10 .XX°±0.5°	



深圳金盟实业有限公司
shenzhenjinmengindustrialco.,ltd