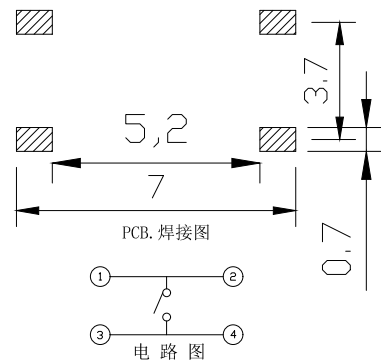


主要技术规格:

1. 额定值: 50mA DC12V
2. 接触电阻: $\leq 100\text{m}\Omega$
3. 操作力: $260 \pm 40\text{gf}$
4. 行程: $0.25 \pm 0.1\text{mm}$
5. 绝缘电阻: $\geq 100\text{M}\Omega$
6. 抗电强度: 250V 50HZ 1Min.
7. 寿命: 100,000 Cycles

材料:

本体: LCP (黑色)
按钮: 黄铜 (黑色)
卡件: 磷铜 (镀银)
弹片: 不锈钢 (镀银)
盖板: 不锈钢
防层膜: PE

MEASURE POINT:
QUADRANT POINT
TANGENCY POINT
INTERSECTION POINT

QP

TP

IP

UNLESS OTHERWISE
SPECIFIED, TOLERANCE:

X. ± 0.25 X. x ± 0.20 X. xx ± 0.15 X. xxx ± 0.10 ANGLES $\pm 2^\circ$ 

深圳金盟实业有限公司

ShenzhenJinmengIndustrialCo., Ltd


TITLE: 轻触开关

4*4*3.0H 铜头贴片

DRAW NO: 01.06.00012

TEL: 0755-89973631

THIRD ANGLE PROJECTION



UNIT:

mm

SCALE:

1:1

SIZE:

A4

SHEET:

1/2