


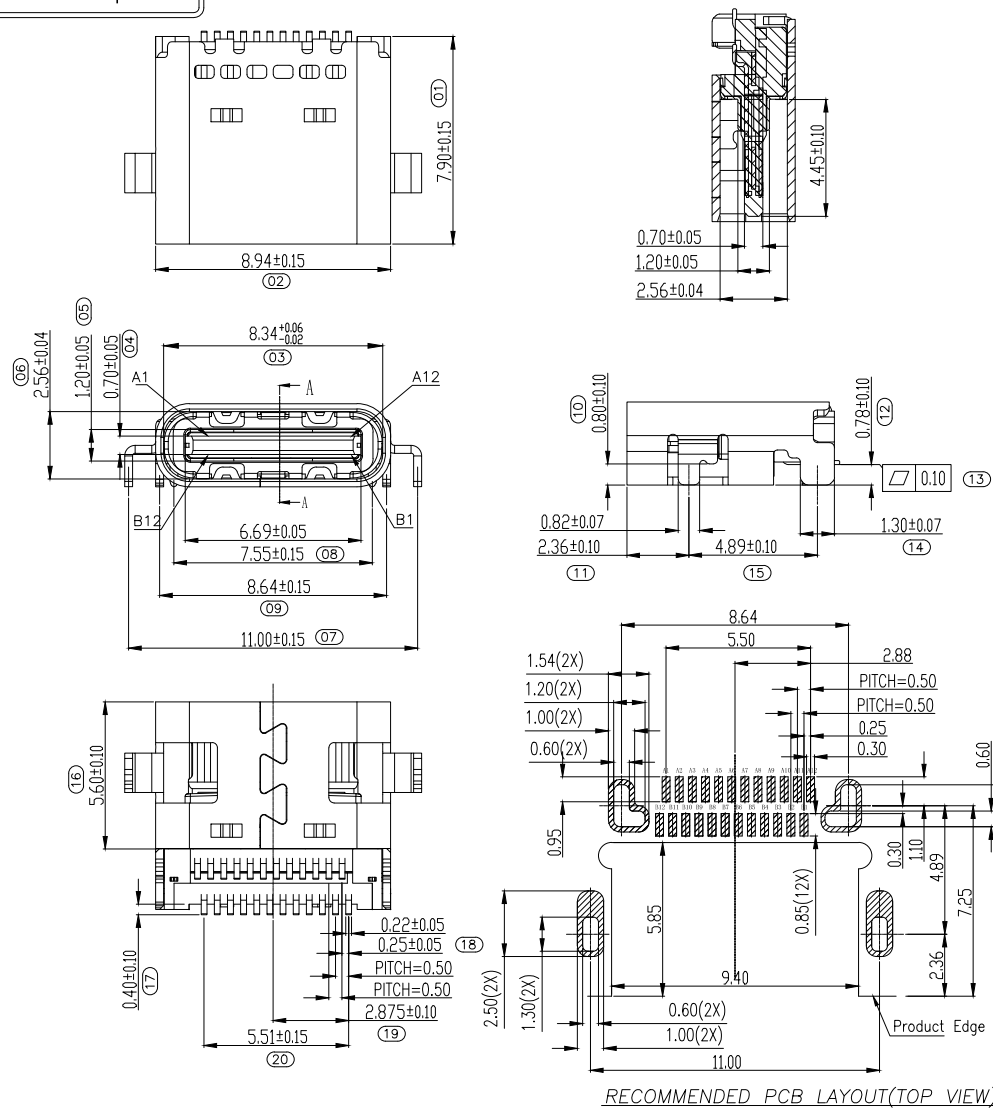

备注:

1.材质:

1.1 胶芯: LCP&PA9T UL94V-0

1.2 端子: 高导电C7025, T=0.15mm; 镍底50U" MIN, 接触区域镀金 (AU 1u") 焊接区镀金G/F

1.3 外壳: SUS304, T=0.30mm; 表面镀镍50U" MIN

1.4 中夹片: SUS301, T=0.15mm;

2.主要特性:

2.1 额定电流: 5A

2.2 接触阻抗: 40mΩ E MAX(初始值)
50mΩ MAX(测试后)

2.3 绝缘阻抗: 100MΩ E MIN

2.4 耐压测试: 100V AC R.M.S.

2.6 整体插入力: 5-20N 整体插入力: 5-20N (耐久后)
整体拔出: 8-20N 整体拔出: 6-20N (耐久后)


2.7 耐久: 10000次

2.8 耐高温: SMT 回流焊 (峰值260°±5°), 塑胶不能有起翘, 融胶等不良, 变色, 翘曲变形在公差范围以内;


2.9 产品须做焊锡测试, 粘锡面积达到95%以上;

3.0 盐雾测试: 48H MIN

3.1 工作温度: -30℃~+85℃

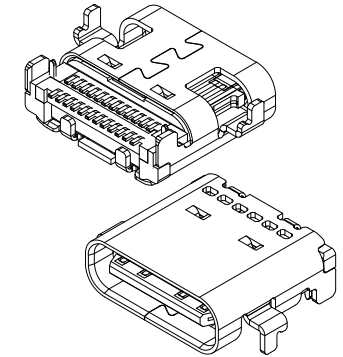

料号编码:

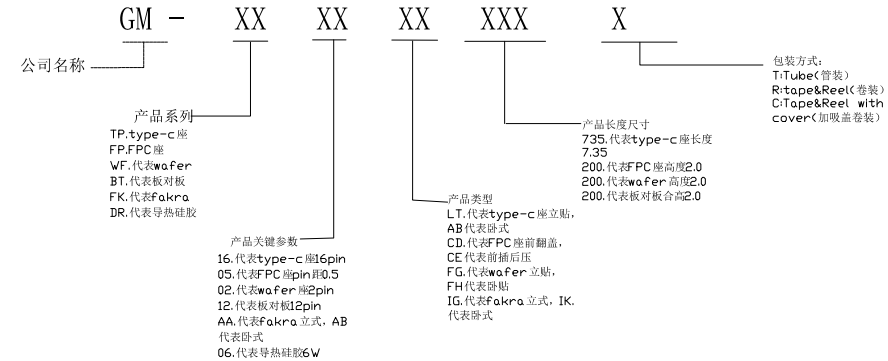

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

MEASURE POINT:
QUADRANT POINT
TANGENCY POINT
INTERSECTION POINT



UNLESS OTHERWISE
SPECIFIED, TOLERANCE:

X. ±0.25
X.x ±0.20
X.xx ±0.15
X.xxx ±0.10
ANGLES ±2°




深圳金盟实业有限公司
ShenzhenJinmengIndustrial Co., Ltd

TITLE: USB 连接器 TYPE C
24PIN 母座 L=7.90mm
双贴沉板0.8mm

DRAW NO: GM-TP 24 AB 790 R

TEL: 0755-89973631

THIRD ANGLE PROJECTION



UNIT:

mm

SCALE:


1:1

SIZE:

A4

SHEET:

1/2

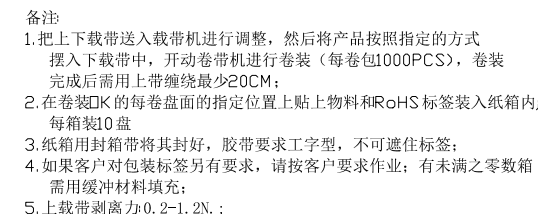

连接器		10KPCS	
名称	料号	用量	规格

MEASURE POINT: QUADRANT POINT TANGENCY POINT INTERSECTION POINT	QP TP IP	 深圳金盟实业有限公司 ShenzhenJinmengIndustrialCo.,Ltd			
UNLESS OTHERWISE SPECIFIED, TOLERANCE: X. ±0.25 X. x ±0.20 X. xx ±0.15 X. xxx ±0.10 ANGLES ±2°	TITLE:USB C TYPE CONNECTOR 卷带10盘+产品10 K装		DRAW NO:GM-TP 24 AB 790 R		
			TEL:0755-89973631		
THIRD ANGLE PROJECTION	 	UNIT: mm	SCALE: 1:1	SIZE: A4	SHEET: 1/2