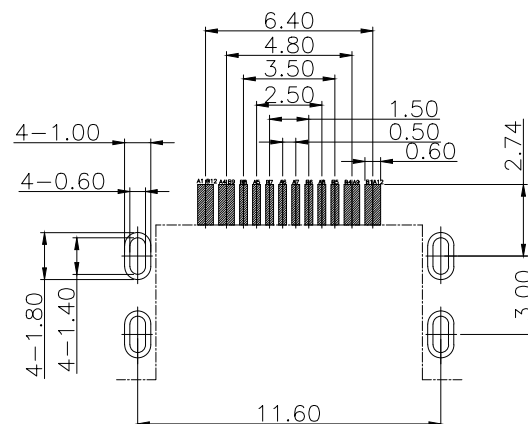

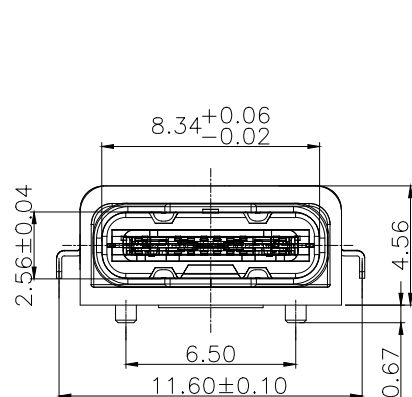

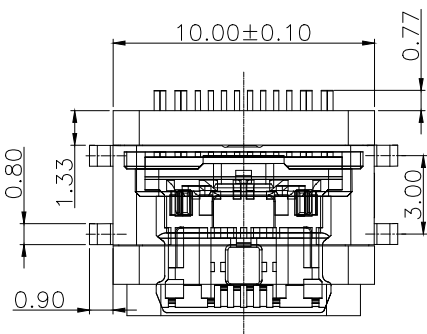


1: 材料: 黑色硅胶, 符合ROHS环境管理物质.
2: 尺寸: 外径:5X11, 内径:3X9, 胶边厚:1.0, 胶边高:1.5

建议防水圈

NOTES:

SPECIFICATION:

1. CURRENT RATING: 5A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. Water Resistance: IPX7

MEASURE POINT:
QUADRANT POINT ☐ QP
TANGENCY POINT ☐ TP
INTERSECTION POINT ☐ IP

UNLESS OTHERWISE
SPECIFIED, TOLERANCE:

X. ± 0.25
X.x ± 0.20
X.xx ± 0.15
X.xxx ± 0.10
ANGLES $\pm 2^{\circ}$




深圳金盟实业有限公司
ShenzhenJinmengIndustrial Co., Ltd

TITLE:USB C TYPE CONNECTOR
TYPE-C 16PIN沉板4脚插板防水
母座头部外露1.2中心高0.48

DRAW NO:01.01.00016

TEL:0755-89973631

THIRD ANGLE PROJECTION



UNIT:

mm

SCALE:

1:1

SIZE:

A4

SHEET:

1/2