

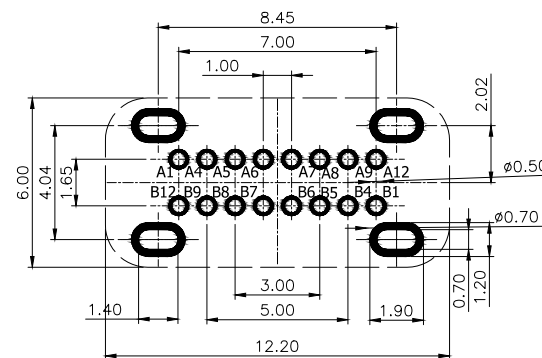
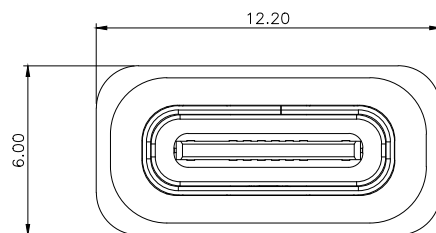


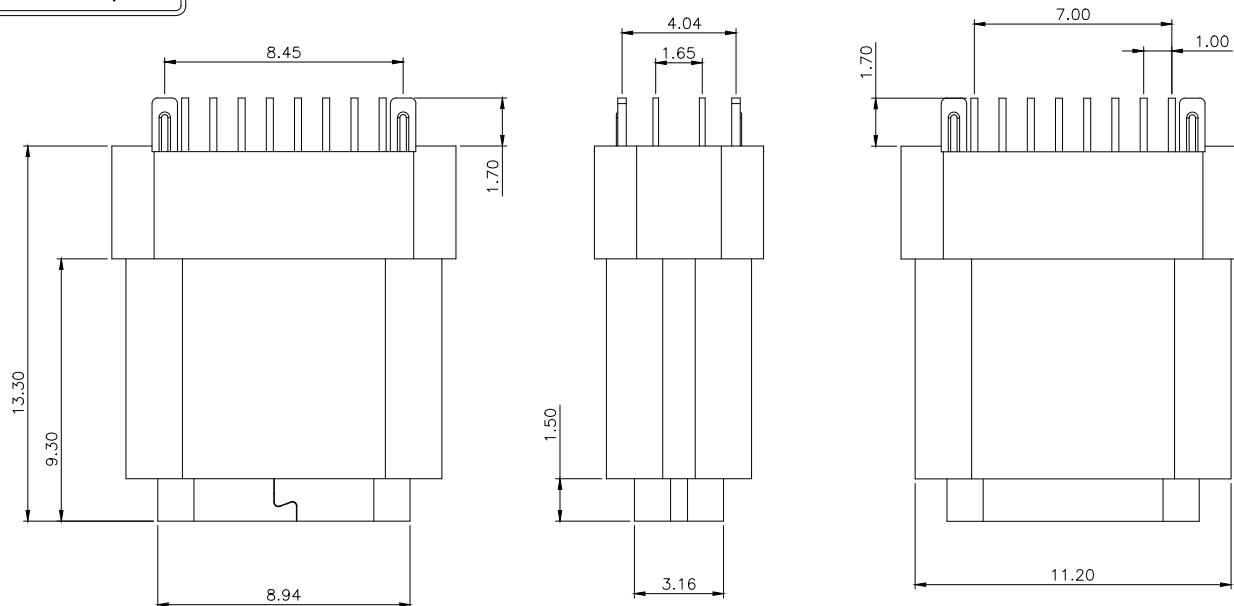

RECOMMENDED PCB LAYOUT(TOP VIEW)T=1.60
DEFAULT TOLERANCE:±0.05

点胶面



备注:

1. 材质:

- 1.1 胶芯: LCP+30%G. F. UL94V-0.
- 1.2 端子: 高导电. T=0.20mm. 半金镍1 μ ".
- 1.3 外壳: SUS304, T=0.30mm; 镀镍80 μ " Min.
- 1.4 钢片: SUS301, T=0.15mm;
- 1.5 护套: PA9T. 黑色.
- 1.6 环氧树脂: 黑色.

2. 电镀: (具体规格参照客户要求).

- 2.1 端子: 接触区域镀金&镀锡.
焊接区域镀锡80 μ "&镀金G/F.
- 2.2 外壳: 镀可焊镍50 μ "MIN.
- 2.3 盐雾: 24H. (具体规格参照客户要求).



3. 主要特性:

- 3.1 额定电流: 5.0A.
- 3.2 接触阻抗: 40 MILLIOHMS Max.
- 3.3 绝缘阻抗: 150V DC/1000 M Ω .
- 3.4 耐压测试: 100V AC/1 mA Max.
- 3.5 沾锡性: 温度260 $\pm$ 5 $^{\circ}$ C, 时间5 $\pm$ 0.5s.
- 3.6 插入力: 5~20N 2. 拔出力: 8~20N.
耐久: 10000次、拔出力 5~20N.
- 3.7 工作温度: -55 $^{\circ}$ C~+80 $^{\circ}$ C.

4. 标示"⊙"为首件, 重点检验尺寸.

5. 标示"▼"为FAI尺寸序号.

6. 所有产品符合RoHS环保要求.



MEASURE POINT:
QUADRANT POINT QP
TANGENCY POINT TP
INTERSECTION POINT IP

UNLESS OTHERWISE
SPECIFIED, TOLERANCE:

X. ± 0.25
X.x ± 0.20
X.xx ± 0.15
X.xxx ± 0.10
ANGLES $\pm 2^{\circ}$




深圳金盟实业有限公司

ShenzhenJinmengIndustrialCo.,Ltd

TITLE:USB C TYPE CONNECTOR

TYPE-C 16P 立插 母座
H=13.30mm (外壳无弹片)

THIRD ANGLE PROJECTION



UNIT:

mm

SCALE:

1:1

SIZE:

A4


SHEET:

1/2

DRAW NO:01.01.00025


TEL:0755-89973631

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND			VBUS	CC1	D+	D-		VBUS			GND
GND			VBUS		D-	D+	CC1	VBUS			GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

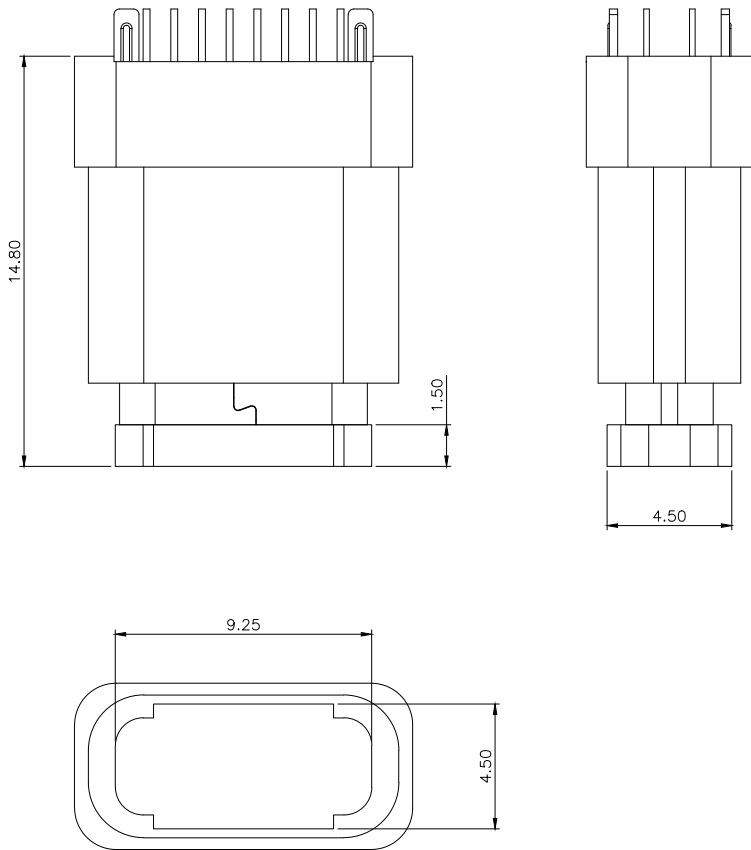

COVER示意图

建议防水圈尺寸

MEASURE POINT: QUADRANT POINT ☐ QP TANGENCY POINT ☐ TP INTERSECTION POINT ☐ IP				深圳金盟实业有限公司 ShenzhenJinmengIndustrialCo.,Ltd	
UNLESS OTHERWISE SPECIFIED, TOLERANCE: X. ±0.25 X.x ±0.20 X.xx ±0.15 X.xxx ±0.10 ANGLES ±2°		TITLE:USB C TYPE CONNECTOR TYPE-C 16P 立插 母座 H=13.30mm (外壳无弹片)		DRAW NO:01.01.00025 TEL:0755-89973631	
		THIRD ANGLE PROJECTION 		UNIT: mm	SCALE: 1:1
				SIZE: A4	SHEET: 1/2