


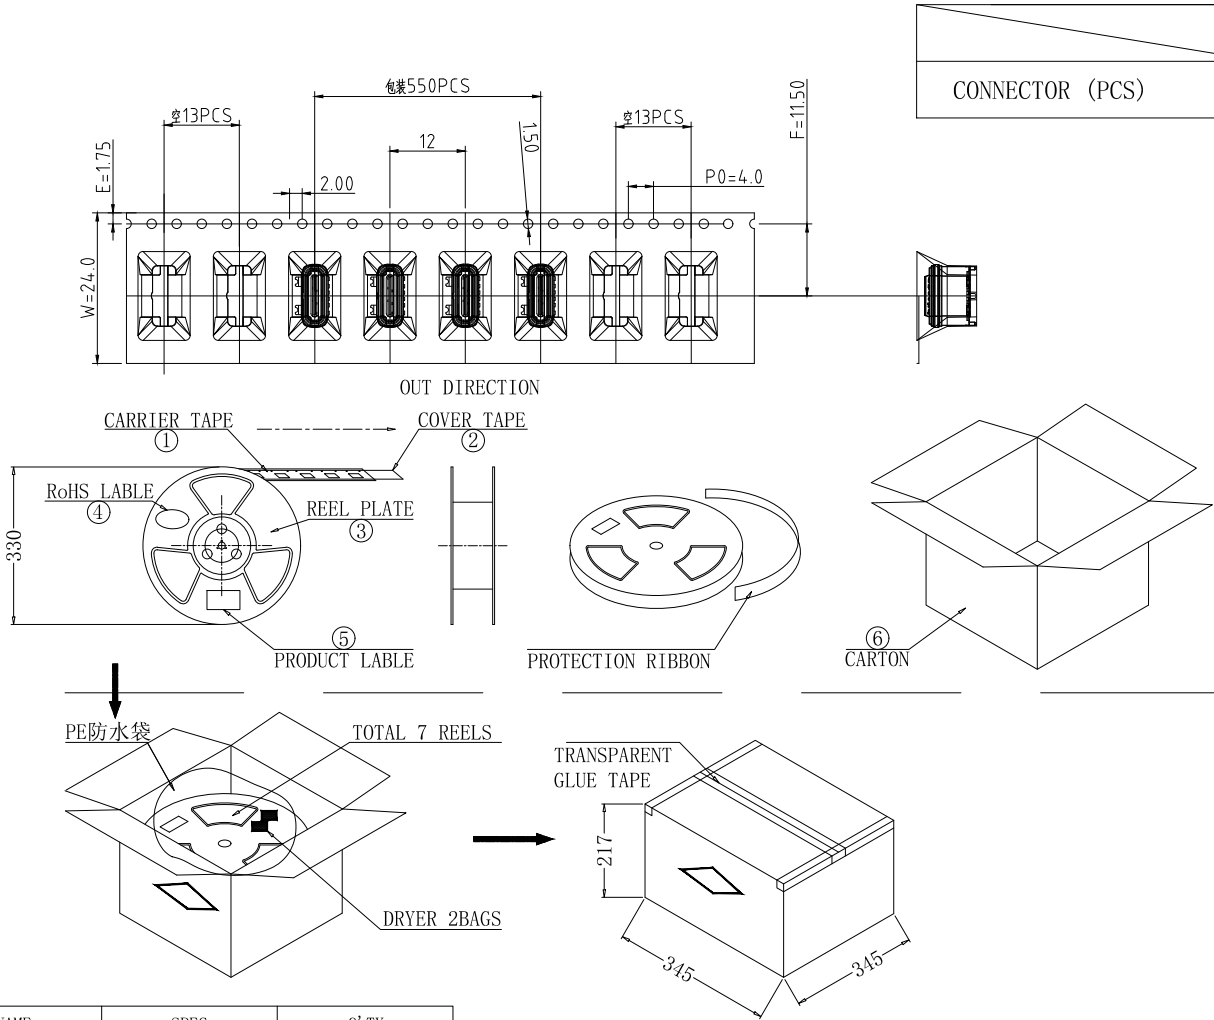

	REEL	CARTON
CONNECTOR (PCS)	550	3850

- 说明:
1. 每卷前后各空13PCS, 尾部用美纹胶纸封住;
 2. 将产品放满盘后, 再卷一圈保护带, 用美纹胶纸将其封住, 并贴上1Pcs物料标签;
 3. 每7卷盘一叠共3850Pcs并装入1个外箱内;
 4. 在搬运过程中要轻拿轻放;
 5. 在运输中不可堆放过多(1.8M最高), 不可重压;
 6. 跌落测试条件:
成品箱从1.2米高度自由落体(一角三棱六面):
a. 产品不可跑出下带凹槽;
b. 产品不可有摔伤, 变形;
c. 内包装材料不可严重破损.


NO.	NAME	SPEC	Q' TY
①	TYPE C RECEPTACLE		7000PCS/CARTON
②	CARRIER TAPE	W=24mm, T=0.40mm	700PCS/PLATE
③	COVER TAPE	W=21.3mm	10PLATES/CARTON
④	REEL PLATE	φ330*100*24.4mm	10PCS/CARTON
⑤	RoHS LABEL		10PCS/CARTON
⑥	PRODUCT LABER		10PCS/CARTON
⑦	CARTON	345*345*217mm	1PCS/PACKAGE

MEASURE POINT:
QUADRANT POINT QP
TANGENCY POINT TP
INTERSECTION POINT IP

UNLESS OTHERWISE
SPECIFIED, TOLERANCE:
X. ±0.25
X. x ±0.20
X. xx ±0.15
X. xxx ±0.10
ANGLES ±2°



深圳金盟实业有限公司
ShenzhenJinmengIndustrialCo.,Ltd

TITLE:USB C TYPE CONNECTOR TYPE-C 6PIN立贴防水母座 四脚 粉末冶金		DRAW NO:01.01.00006			
		TEL:0755-89973631			
THIRD ANGLE PROJECTION 	UNIT:	SCALE:	SIZE:	SHEET:	
	mm	1:1	A4	1/2	