

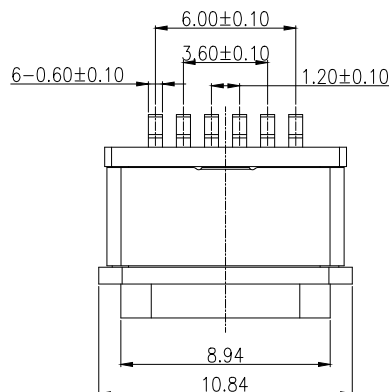
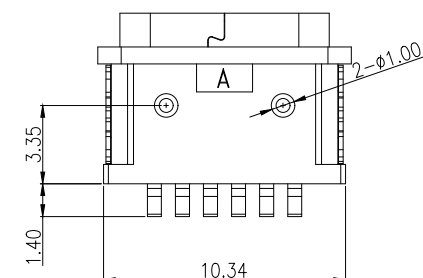
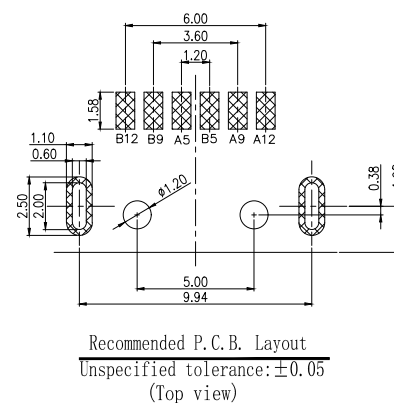
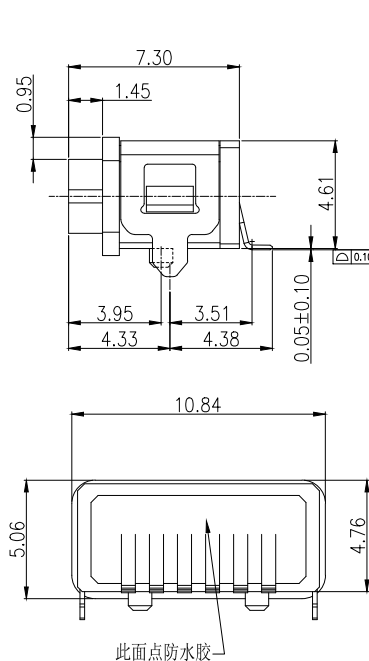


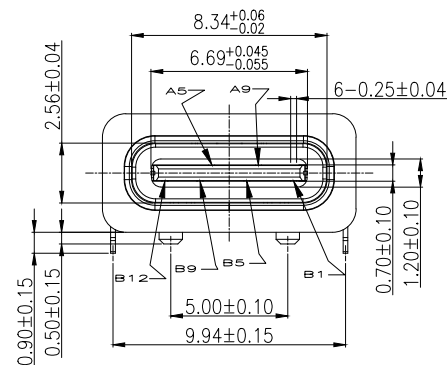

注: 防水圈是圆形截面, 直径为1.0mm的
硅胶圈, 防水圈挤压力, 由1.0mm挤压到
0.5mm ~ 0.6mm, 防水效果好




A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

SUS304R-1/2H. T=0.20mm	Ni:50u"Min;
SUS304R-1/2H. T=0.30mm	Ni:50u"Min;
PA9T (G. F30%), BLACK.	/
C2680R-H. T=0.20mm	Ni:30u"Min; Au:CONTACT AREA:1u", Solder AREA:G/F
LCP (G. F30%) BLACK.	/
MATERIALS	FINISH

NOTES:

- CURRENT RATING:
3.0A MAX.
- DIELECTRIC WITHSTAND VOLTAGE:
100VAC.
- TEMPERATURE RANGE:
-30 °C ~ 85 °C.
- CONTACT RESISTANCE:
40 MILLIONHM MAX.
- INSULATION RESISTANCE:
100 MEGOHMS MIN.
- INSERTION FORCE :
5N~20N.
- UNMATING FORCE:
8N~20N.
- DURABILITY:
10,000 CYCLES.
- WATERPROOF RATING: IPX7.
- ALL PRODUCTS COMPLY WITH RoHS
ENVIRONMENTAL REQUIREMENTS.



MEASURE POINT:
QUADRANT POINT ☐ QP
TANGENCY POINT ☐ TP
INTERSECTION POINT ☐ IP

UNLESS OTHERWISE
SPECIFIED, TOLERANCE:
X. ±0.25
X. x ±0.20
X. xx ±0.15
X. xxx ±0.10
ANGLES ±2°




深圳金盟实业有限公司
ShenzhenJinmengIndustrialCo., Ltd

TITLE: USB C TYPE CONNECTOR
TYPE C 6Pin SMT 防水
(点胶款) 4+2 成品
工程图

DRAW NO: 01.01.00012
TEL: 0755-89973631

THIRD ANGLE PROJECTION



UNIT:

mm

SCALE:

1:1

SIZE:

A4

SHEET:

1/2